

Studies on Multi-step Addition of NMP in (LiNi_{0.80}Co_{0.15}Al_{0.05}) (NCA) Cathode Slurry Preparation and its Rheological, Mechanical Strength and Electrochemical Properties for Li-ion Cells

Vasudevarao Pasala*, Satyanarayana Maddukuri, V. Sethuraman, Rekha Lankipalli, Devi Gajula, and Venkateswarlu Manne

Research and Development, Li-ion Battery Technology; New Energy Storage Technology, Amara Raja Batteries Limited, Tirupati-517520, India

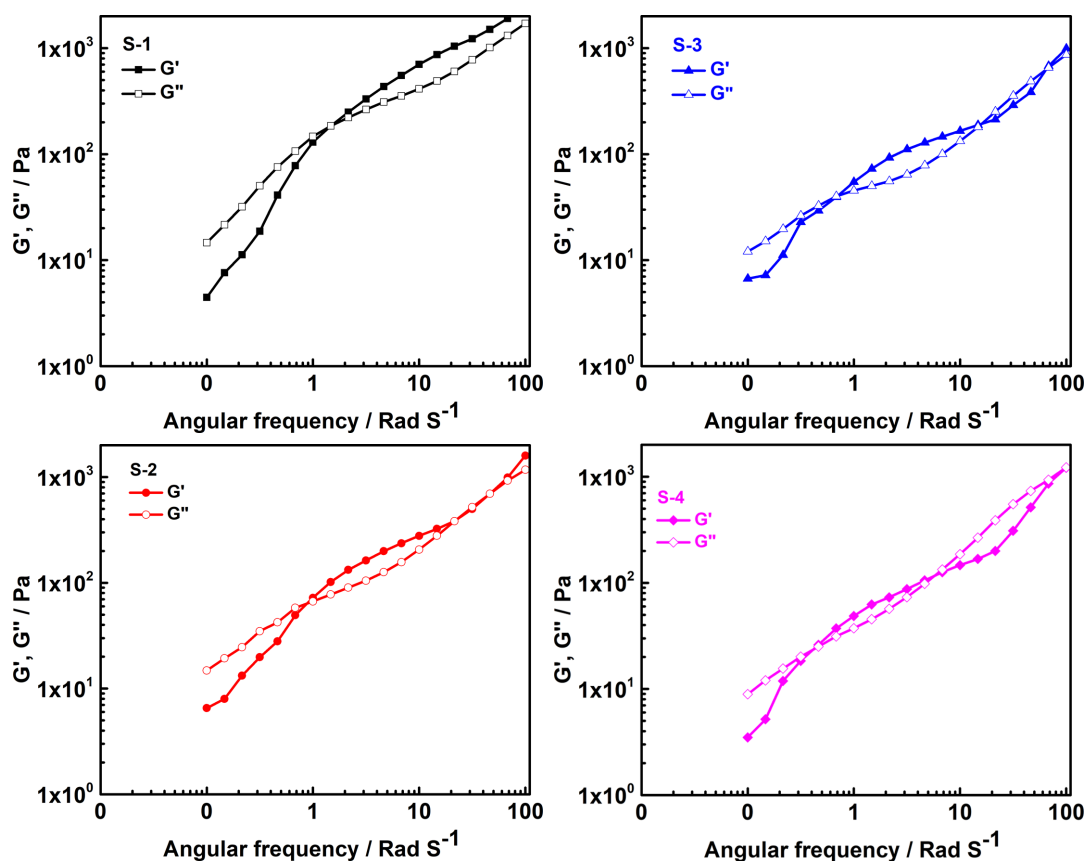


Fig. S1. Viscoelastic modulus of the slurries prepared by different mixing processes against the angular frequency of S-1 to S-4.

*E-mail address: vasupchem@gmail.com

DOI: <https://doi.org/10.33961/jecst.2023.00115>

This is an open-access article distributed under the terms of the Creative Commons Attribution Non-Commercial License (<http://creativecommons.org/licenses/by-nc/4.0>) which permits unrestricted non-commercial use, distribution, and reproduction in any medium, provided the original work is properly cited.